



# TRITON

OUR SECTORS

## Cold storage

Extend the shelf-life and quality of perishable stock with our reliable temperature controlled units.



## OUR SECTORS – COLD STORAGE

# Buy or lease mobile cold storage

Realize substantial power savings from the utilization of the software on our Refrigerated Containers.

### Substantial global stock near you

Mobile and highly versatile, Triton Refrigerated Containers are often more economical than traditional cold-storage rooms or brick and mortar facilities.

Triton Refrigerated Containers are designed to store products at optimal environmental conditions, between -30C and +30C, for as long as required. Resistant to bacteria, they are suitable for storing a wide range of perishable goods, including dairy, seafood, meat, alcohol, vegetables, pharmaceutical products, and temperature-sensitive equipment.

Triton Reefers have an excellent temperature pull-down time. This is particularly beneficial when the unit doors are being regularly opened and closed, as it aids in recovering the set temperature of the container's internal climate. In addition, this feature can help extend the shelf life of perishable goods.

Available for sale or lease with flexible terms, our portable Refrigerated Containers are available in various sizes, and conditions. They are ideal for storing seasonal stock overflow and can be positioned in a wide number of outdoor and indoor locations. Their secure design protects goods from the outside elements, vermin, and theft.

### Enhanced track & trace

Additional Track & trace devices can be installed on request. This enables the operator to control and change parameters remotely.

**PLEASE NOTE:** The following pages showcase a small sample of products in the Triton global inventory. We stock a wide range of products for lease and sale in various conditions. Get in touch with your local Triton representative for more information.



**CLASSIFICATION**

**For Sale: New**


Available via Triton's global network of supply locations.

# 20ft Refrigerated Container




## FEATURES

- Designed for safe transportation of perishable food, beverages and temperature sensitive cargo
- Ideal for on-site temperature controlled storage
- Strong, robust, insulated and repair friendly
- Resistant to bacteria
- Low heat leakage values
- Low GWP refrigerants compatible
- State-of-the-art design and low power consumption makes units highly efficient
- With HGSS roof end panels, vacuum valve, T-bar flooring and interior aluminum scuff lining
- Provisioned for track & trace feature
- Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- Can be ordered with Carrier or Thermo King machinery, with 3 Phase Power and CFC friendly refrigerant
- Backed up by Triton's global network of supply locations and dedicated sales and support teams
- Available globally

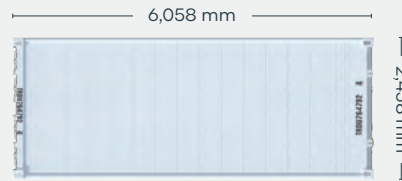

REEFER ROOF

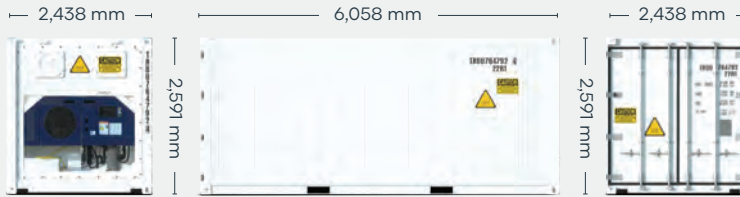

REEFER FRONT

REEFER SIDE

REEFER REAR

## DIMENSIONS (METRIC/IMPERIAL)

### EXTERNAL DIMENSIONS

<b>Length</b>	6,058 mm	19' 10.5"
<b>Width</b>	2,438 mm	8' 0.0"
<b>Height</b>	2,591 mm	8' 6.0"

### INTERNAL DIMENSIONS

<b>Length</b>	5,454 mm	17' 10.7"
<b>Width</b>	2,290 mm	7' 6.2"
<b>Height</b>	2,276 mm	7' 5.6"

### DOOR OPENING

<b>Width</b>	2,294 mm	7' 6.3"
<b>Height</b>	2,264 mm	7' 5.1"

### CAPACITY & WEIGHTS

<b>Inside Cubic Capacity</b>	28.4 m <sup>3</sup>	1003 ft <sup>3</sup>
<b>Max Gross</b>	30,480 kg	67,200 lbs
<b>Payload</b>	27,650 kg	60,960 lbs
<b>Tare*</b>	2,830 kg	6,240 lbs

\*Tare can vary slightly based on reefer machine type.

**NOTE:** The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

**DISCLAIMER:** Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.



# 40ft High Cube Refrigerated Container




## CLASSIFICATION

### Lease

Available via Triton's global network of supply locations.

## FEATURES

- Additional height provides extra internal cubic capacity, which means greater interior stacking capacity for your goods
- Designed for safe transportation of temperature sensitive cargo and frozen and perishable goods. (Food-grade approved)
- Ideal for on-site temperature controlled storage
- Strong, robust, insulated and repair friendly
- State-of-the-art design and low power consumption makes units highly efficient
- Standard features: HGSS roof end panels, T-bar flooring and interior aluminum scuff lining
- Provisioned for track & trace feature
- Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- Resistant to bacteria
- Low heat leakage values
- Low GWP refrigerants compatible
- Can be ordered with Carrier, Starcool, Daikin or Thermo King machinery, with 3 Phase Power. These leading brands offer worldwide availability for parts and service
- Backed up by Triton's global network of supply locations and dedicated leasing and support teams
- Available globally

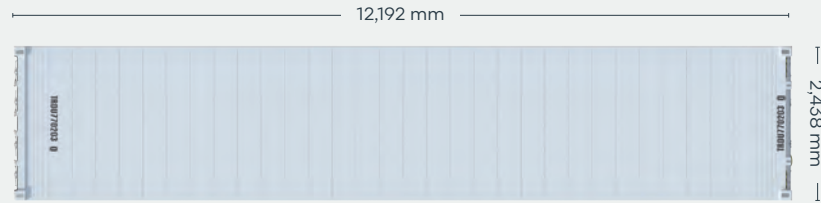

REEFER ROOF



REEFER FRONT

REEFER SIDE

REEFER REAR

## DIMENSIONS (METRIC/IMPERIAL)

### EXTERNAL DIMENSIONS

<b>Length</b>	12,192 mm	40' 0.0"
<b>Width</b>	2,438 mm	8' 0.0"
<b>Height</b>	2,896 mm	9' 6.0"

### INTERNAL DIMENSIONS

<b>Length</b>	11,588 mm	38' 0.2"
<b>Width</b>	2,290 mm	7' 6.2"
<b>Height</b>	2,547.5 mm	8' 4.3"

### DOOR OPENING

<b>Width</b>	2,294 mm	7' 6.3"
<b>Height</b>	2,569 mm	8' 5.1"

### CAPACITY & WEIGHTS

<b>Inside Cubic Capacity</b>	67.6 m <sup>3</sup>	2,387 ft <sup>3</sup>
<b>Max Gross</b>	35,000 kg	77,160 lbs
<b>Payload</b>	30,440 kg	67,110 lbs
<b>Tare*</b>	4,560 kg	10,050 lbs

\*Tare can vary slightly based on reefer machine type.

**NOTE:** The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

**DISCLAIMER:** Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.



#### CLASSIFICATION

#### For Sale: Used

Available via Triton's global network of supply locations.

# 45ft Used High Cube Pallet Wide Refrigerated Container



#### FEATURES

- Available in a range of conditions to suit all needs
- Additional height and length provides extra internal cubic capacity, which means greater interior stacking capacity for your goods
- Refrigerated and insulated shipping containers
- Designed for safe transportation of perishable food, beverages and temperature sensitive cargo
- Ideal for on-site temperature controlled storage
- State of the art design makes units highly efficient
- Most units have stainless steel lined interiors and T-bar flooring
- Most machinery comes with 3 Phase power and CFC friendly refrigerant
- Backed up by Triton's global network of supply locations and dedicated sales and support teams
- Available globally



REEFER ROOF



REEFER FRONT

REEFER SIDE

REEFER REAR

## DIMENSIONS (METRIC/IMPERIAL)

### EXTERNAL DIMENSIONS

<b>Length</b>	13,813 mm	45' 0.0"
<b>Width</b>	2,550 mm	8' 3.6"
<b>Height</b>	2,900 mm	9' 5.1"

### DOOR OPENING

<b>Width</b>	2,440 mm	8' 0.0"
<b>Height</b>	2,570 mm	8' 4.3"

### INTERNAL DIMENSIONS

<b>Length</b>	13,261 mm	43' 0.0"
<b>Width</b>	2,440 mm	8' 0.0"
<b>Height</b>	2,570 mm	8' 4.3"

### CAPACITY & WEIGHTS

<b>Inside Cubic Capacity</b>	83.5 m <sup>3</sup>	2,949 ft <sup>3</sup>
<b>Max Gross</b>	35,000 kg	77,160 lbs
<b>Payload</b>	28,920 kg	63,760 lbs
<b>Tare*</b>	6,080 kg	13,400 lbs

\*Tare can vary slightly based on reefer machine type.

**NOTE:** The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

**DISCLAIMER:** Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.





## CLASSIFICATION

### Lease


Available via Triton's global network of supply locations.

# Carrier RG15 – Series 55 Clip On



## FEATURES

- Ultra-high-efficiency generator enables full power for ISO reefers
- Simple, robust design with familiar operations and maintenance
- Compatible with all reefer machinery manufacturers
- Industry standard, proven 2.2-litre 18.5 KW diesel engine style. EU Stage V compliant, with electronic governor
- CE option included
- 455 litre fuel tank built into all-steel frame
- Standard implementation of enhanced FuelWise™ functionality, a fuel-saving technology that automatically switches the generator set between two speeds via a simple black box controller
- Reduced fuel consumption extends range of distances traveled and reduces carbon footprint
- Pin-mount system with clamp provision (clamp option). For easy attachment and detachment from container box
- Frame and sheet metal components powder-coated for durability and superior corrosion protection
- Carrier full-flow spin-on oil filter with internal bypass filtration
- Integral fuel filter with water separator
- High-efficiency air cleaner
- 12V DC maintenance-free battery and solid state battery charger
- **NEW!** Track and Trace options available

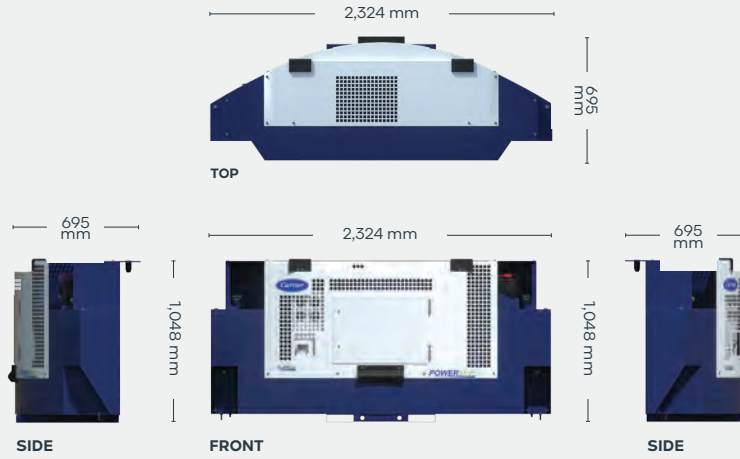

## DIMENSIONS (METRIC/IMPERIAL) & SPECIFICATIONS

### EXTERNAL DIMENSIONS

<b>Length</b>	2,324 mm	7' 7.5"
<b>Width</b>	695 mm	2' 3.4"
<b>Height</b>	1,048 mm	3' 5.2"

### ENGINE

V2203L-DI-E4B, 4-cylinder, water-cooled, 2.2 litre direct-injection diesel engine

### FUEL TYPE & CAPACITY

<b>Fuel Type</b>	Diesel	
<b>Fuel Tank</b>	455 liter	120 gal

### BATTERY

<b>Type</b>	12V DC maintenance-free battery
-------------	---------------------------------

### APPROXIMATE WEIGHT

<b>Less fuel</b>	875 kg
------------------	--------

**NOTE:** The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

**DISCLAIMER:** Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.



## CLASSIFICATION

### Lease


Available via Triton's global network of supply locations.

# Thermo King SG-5000 Clip On



## FEATURES

- Ensure total product protection, time after time
- The intelligent controls system allows both quick local diagnostic and full monitoring over telematics
- Compatible with all reefer machinery manufacturers
- Proven reliability and durability
- Exceed the power requirements for any ISO reefer
- Surpasses all North American emission compliance requirements including: EPA, CARB, Environment Canada and EEA
- Auto restart
- Built to last and perform – lowest total cost of ownership (TCO)
- Automated pre-trip testing
- Data logging of events, alarms and messages
- Delivered in both undermount and clip-on design
- Eco power with two speed technology
- Pin-mount system with clamp provision (clamp option). For easy attachment and detachment from container box
- **NEW!** Track and Trace options available

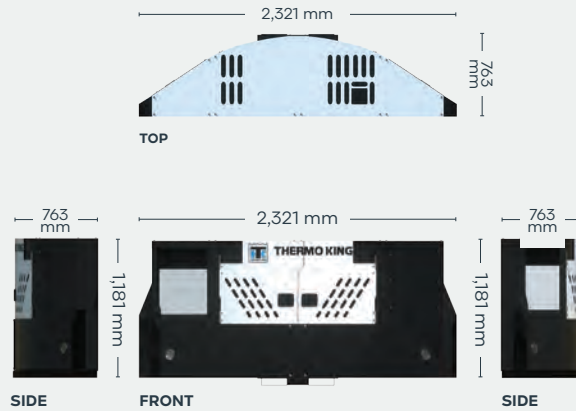

## DIMENSIONS (METRIC/IMPERIAL) & SPECIFICATIONS

### EXTERNAL DIMENSIONS

<b>Length</b>	2,321 mm	7' 7.3"
<b>Width</b>	763 mm	2' 6.0"
<b>Height</b>	1,181 mm	3' 10.5"

### ENGINE

Thermo King diesel engine compliant with EPA Tier 4 and CARB regulations

### FUEL TYPE

No. 2 diesel (under normal conditions)  
No. 1 diesel (cold weather fuel)

### SPEED & POWER

<b>Rotational Speed</b>	1500 ±25rpm / 1800 ±25rpm
<b>Generator Output</b>	460/230Vac, 3Phase, 60Hz
<b>Power Apparent</b>	15kW
<b>Power Rotational</b>	18.75 kVA
<b>Speed</b>	1800rpm
<b>Electrical System</b>	SG+ microprocessor controller
<b>Battery</b>	12V, 925CCA

### FUEL TANK Included in all models

<b>SGCO</b>	473 litres	125gal
<b>SGCM</b>	302l or 198l	80gal or 50gal
<b>SGSM</b>	302l or 198l	80gal or 50gal

### WEIGHT - LESS FUEL

<b>SGCO</b>	871kg	1920lbs
<b>SGCM</b>		
50gal tank	653kg	1440lbs
80gal tank	680kg	1500lbs

**NOTE:** The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

**DISCLAIMER:** Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.



HERE. THERE. EVERYWHERE

# We supply the world

Triton is the largest lessor of intermodal containers in the world with over 7 million TEU of containers. Our services are available in 89 countries around the globe. So, no matter where you need containers, we'll have them nearby. To find your nearest Triton Container Sales manager visit [www.tritoncontainer.com](http://www.tritoncontainer.com).



**Global inventory of  
cargoworthy containers  
for lease and sale.**



**Unrivalled container  
supply at competitive  
prices.**



**Outstanding and  
highly responsive  
customer services.**



**Global network of 20 offices  
and 3 independent agencies  
across 16 countries.**



**Equipment  
built to the  
highest quality.**



**Our size, strength and reliability  
make us the go-to supplier of  
intermodal shipping containers.**



**TRITON**

We're the biggest for a reason, contact our friendly experts and experience Triton's world-leading service and cost savings today. Imagine what we can do together.

[www.tritoncontainer.com](http://www.tritoncontainer.com)