



**TRITON**

OUR SECTORS

## Pharmaceuticals

Storing critical supplies at optimum temperatures.



## OUR SECTORS – PHARMACEUTICALS

# Portable cold storage you can rely on

Cold chain transport relies on being able to reliably move freight in a consistent temperature-controlled environment throughout its journey.

We lease and sell high-quality, temperature-controlled storage ideal for slowing the natural deterioration of many pharmaceutical products.

Transporting pharmaceutical products between locations with drastic external temperature variations can be challenging. A temperature variation of as little as a few degrees can be enough to compromise an entire shipment, potentially creating significant losses and reputational damage. However, we can help significantly reduce this risk as Triton Reefers are designed to withstand even the most extreme environments. With potential temperatures

ranging between -30C and +30C, it is possible to precisely control the internal climate of our containers to provide the optimum environment for pharmaceutical goods.

### Advanced technology

Built with the latest microprocessors to maintain a consistent temperature, Triton Refrigerated Containers are bacteria resistant, efficient, practical and have low noise generation. Available globally, they can be ordered with Carrier, Starcool, Daikin, or Thermo King machinery.

### Additional track & trace

Track & trace devices can be installed on request. This feature enables the operator to control and change parameters remotely, and monitor for malfunctions and other vital data.

**PLEASE NOTE:** The following pages showcase a small sample of products in the Triton global inventory. We stock a wide range of products for lease and sale in various conditions. Get in touch with your local Triton representative for more information.



## CLASSIFICATION

### Lease


Available via Triton's global network of supply locations.

# 20ft Refrigerated Container



## FEATURES

- Designed for safe transportation of temperature sensitive cargo and frozen & perishable goods. (Food-grade approved)
- Ideal for on-site temperature controlled storage
- Strong, robust, insulated and repair friendly
- State-of-the art design and low power consumption makes units highly efficient
- Standard features: HGSS roof end panels, T-bar flooring and interior aluminum scuff lining
- Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- Can be ordered with Carrier, Starcool, Daikin or Thermo King machinery, with 3 Phase Power. These leading brands offer worldwide availability for parts and service
- Provisioned for track & trace feature
- Resistant to bacteria
- Low heat leakage values
- Low GWP refrigerants compatible
- Backed up by Triton's global network of supply locations and dedicated leasing and support teams
- Available globally

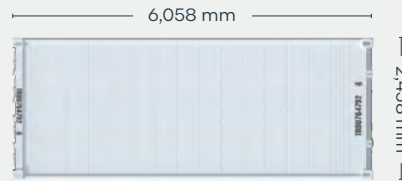

REEFER ROOF



REEFER FRONT

REEFER SIDE

REEFER REAR

## DIMENSIONS (METRIC/IMPERIAL)

### EXTERNAL DIMENSIONS

<b>Length</b>	6,058 mm	19' 10.5"
<b>Width</b>	2,438 mm	8' 0.0"
<b>Height</b>	2,591 mm	8' 6.0"

### INTERNAL DIMENSIONS

<b>Length</b>	5,454 mm	17' 10.7"
<b>Width</b>	2,290 mm	7' 6.2"
<b>Height</b>	2,276 mm	7' 5.6"

### DOOR OPENING

<b>Width</b>	2,294 mm	7' 6.3"
<b>Height</b>	2,264 mm	7' 5.1"

### CAPACITY & WEIGHTS

<b>Inside Cubic Capacity</b>	28.4 m <sup>3</sup>	1003 ft <sup>3</sup>
<b>Max Gross</b>	30,480 kg	67,200 lbs
<b>Payload</b>	27,650 kg	60,960 lbs
<b>Tare*</b>	2,830 kg	6,240 lbs

\*Tare can vary slightly based on reefer machine type.

**NOTE:** The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

**DISCLAIMER:** Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.





# 40ft High Cube Refrigerated Container




## CLASSIFICATION

### Lease


Available via Triton's global network of supply locations.

## FEATURES

- Additional height provides extra internal cubic capacity, which means greater interior stacking capacity for your goods
- Designed for safe transportation of temperature sensitive cargo and frozen and perishable goods. (Food-grade approved)
- Ideal for on-site temperature controlled storage
- Strong, robust, insulated and repair friendly
- State-of-the-art design and low power consumption makes units highly efficient
- Standard features: HGSS roof end panels, T-bar flooring and interior aluminum scuff lining
- Provisioned for track & trace feature
- Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- Resistant to bacteria
- Low heat leakage values
- Low GWP refrigerants compatible
- Can be ordered with Carrier, Starcool, Daikin or Thermo King machinery, with 3 Phase Power. These leading brands offer worldwide availability for parts and service
- Backed up by Triton's global network of supply locations and dedicated leasing and support teams
- Available globally

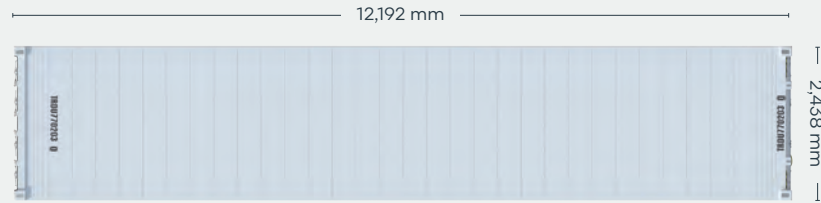

REEFER ROOF

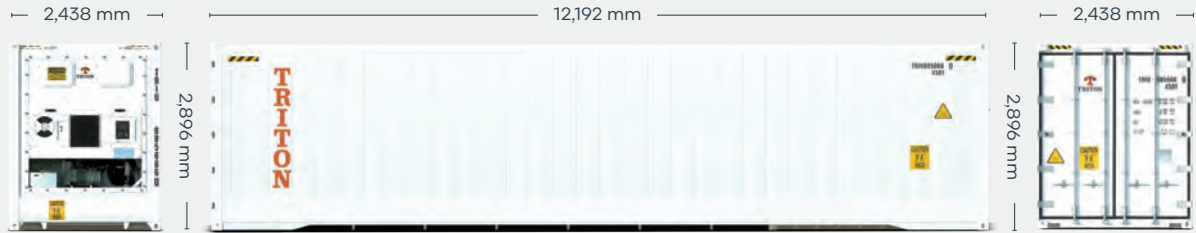

REEFER FRONT

REEFER SIDE

REEFER REAR

## DIMENSIONS (METRIC/IMPERIAL)

### EXTERNAL DIMENSIONS

<b>Length</b>	12,192 mm	40' 0.0"
<b>Width</b>	2,438 mm	8' 0.0"
<b>Height</b>	2,896 mm	9' 6.0"

### INTERNAL DIMENSIONS

<b>Length</b>	11,588 mm	38' 0.2"
<b>Width</b>	2,290 mm	7' 6.2"
<b>Height</b>	2,547.5 mm	8' 4.3"

### DOOR OPENING

<b>Width</b>	2,294 mm	7' 6.3"
<b>Height</b>	2,569 mm	8' 5.1"

### CAPACITY & WEIGHTS

<b>Inside Cubic Capacity</b>	67.6 m <sup>3</sup>	2,387 ft <sup>3</sup>
<b>Max Gross</b>	35,000 kg	77,160 lbs
<b>Payload</b>	30,440 kg	67,110 lbs
<b>Tare*</b>	4,560 kg	10,050 lbs

\*Tare can vary slightly based on reefer machine type.

**NOTE:** The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

**DISCLAIMER:** Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.



# 45ft High Cube Pallet Wide Refrigerated Container



## CLASSIFICATION


### Lease

Available via Triton's global network of supply locations.




## FEATURES

- Additional height and length provides extra internal cubic capacity, which means greater interior stacking capacity for your goods
- Designed for safe transportation of temperature sensitive cargo and frozen and perishable goods. (Food-grade approved)
- Resistant to bacteria
- Ideal for on-site temperature controlled storage
- Strong, robust, insulated and repair friendly
- State-of-the-art design and low power consumption makes units highly efficient
- Provisioned for track & trace feature
- Low GWP refrigerants compatible
- Standard features: HGSS roof end panels, document holder, power cable guide, cargo stowage bars, vacuum valve, flat flooring and interior aluminum scuff lining
- Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- Can be ordered with Carrier, Starcool, Daikin or Thermo King machinery, with 3 Phase Power. These leading brands offer worldwide availability for parts and service
- Backed up by Triton's global network of supply locations and dedicated leasing and support teams
- Available globally

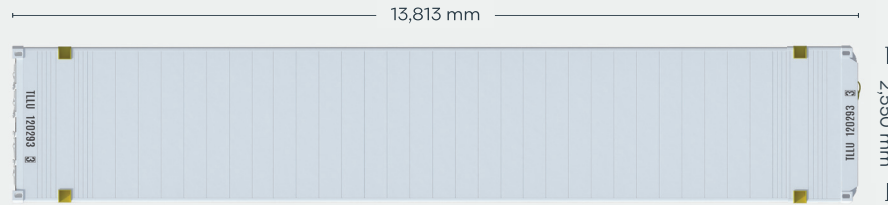

REEFER ROOF

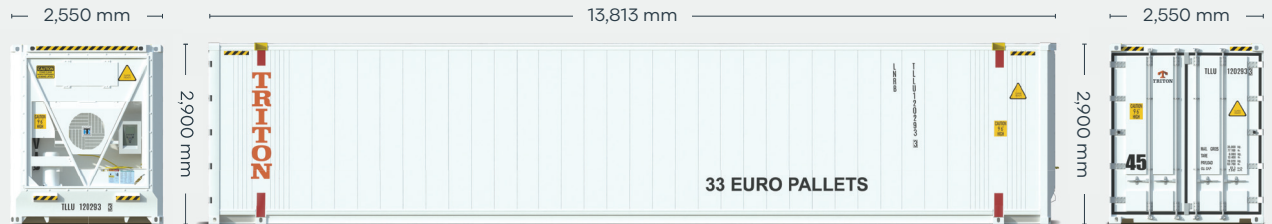

REEFER FRONT

REEFER SIDE

REEFER REAR

## DIMENSIONS (METRIC/IMPERIAL)

### EXTERNAL DIMENSIONS

<b>Length</b>	13,813 mm	45' 0.0"
<b>Width</b>	2,550 mm	8' 3.6"
<b>Height</b>	2,900 mm	9' 5.1"

### DOOR OPENING

<b>Width</b>	2,440 mm	8' 0.0"
<b>Height</b>	2,570 mm	8' 4.3"

### INTERNAL DIMENSIONS

<b>Length</b>	13,261 mm	43' 0.0"
<b>Width</b>	2,440 mm	8' 0.0"
<b>Height</b>	2,570 mm	8' 4.3"

### CAPACITY & WEIGHTS

<b>Inside Cubic Capacity</b>	83.5 m <sup>3</sup>	2,949 ft <sup>3</sup>
<b>Max Gross</b>	35,000 kg	77,160 lbs
<b>Payload</b>	28,920 kg	63,760 lbs
<b>Tare*</b>	6,080 kg	13,400 lbs

\*Tare can vary slightly based on reefer machine type.

**NOTE:** The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

**DISCLAIMER:** Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.





#### CLASSIFICATION

#### For Sale: Used

Available via Triton's global network of supply locations.

# 20ft Used Refrigerated Container



#### FEATURES

- Available in a range of conditions to suit all needs
- Refrigerated and insulated shipping containers
- Ideal for on-site temperature controlled storage
- Designed for safe transportation of perishable food, beverages and temperature sensitive cargo
- State-of-the-art design makes units highly efficient
- Most units have stainless steel lined interiors and T-bar flooring
- Most machinery comes with 3 Phase power and CFC friendly refrigerant
- Backed up by Triton's global network of supply locations and dedicated sales and support teams
- Available globally



REEFER ROOF



REEFER FRONT



REEFER SIDE



REEFER REAR

## DIMENSIONS (METRIC/IMPERIAL)

### EXTERNAL DIMENSIONS

<b>Length</b>	6,058 mm	19' 10.5"
<b>Width</b>	2,438 mm	8' 0.0"
<b>Height</b>	2,591 mm	8' 6.0"

### INTERNAL DIMENSIONS

<b>Length</b>	5,454 mm	17' 10.7"
<b>Width</b>	2,290 mm	7' 6.2"
<b>Height</b>	2,276 mm	7' 5.6"

### DOOR OPENING

<b>Width</b>	2,294 mm	7' 6.3"
<b>Height</b>	2,264 mm	7' 5.1"

### CAPACITY & WEIGHTS

<b>Inside Cubic Capacity</b>	28.4 m <sup>3</sup>	1003 ft <sup>3</sup>
<b>Max Gross</b>	30,480 kg	67,200 lbs
<b>Payload</b>	27,650 kg	60,960 lbs
<b>Tare*</b>	2,830 kg	6,240 lbs

\*Tare can vary slightly based on reefer machine type.

**NOTE:** The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

**DISCLAIMER:** Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.



## CLASSIFICATION

### For Sale: Used

Available via Triton's global network of supply locations.

# 40ft Used High Cube Refrigerated Container




## FEATURES

- Additional height provides extra internal cubic capacity, which means greater interior stacking capacity for your goods
- Designed for safe transportation of perishable food, beverage and temperature sensitive cargo
- Ideal for on-site temperature controlled storage
- Strong, robust, insulated and repair friendly
- State-of-the-art design and low power consumption makes units highly efficient
- Provisioned for track & trace feature
- With HGSS roof end panels, vacuum valve, T-bar flooring and interior aluminum scuff lining
- Resistant to bacteria
- Low heat leakage values
- Low GWP refrigerants compatible
- Can be ordered with Carrier or Thermo King machinery, with 3 Phase Power and CFC friendly refrigerant. Both leading brands offer worldwide availability for parts and service
- Backed up by Triton's global network of supply locations and dedicated sales and support teams
- Available globally



REEFER ROOF

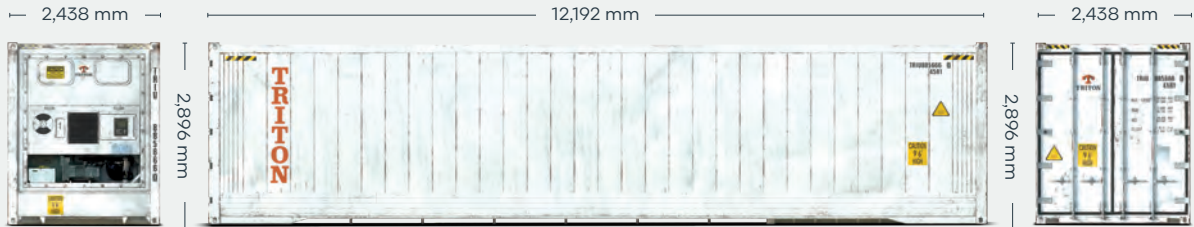

REEFER FRONT

REEFER SIDE

REEFER REAR

## DIMENSIONS (METRIC/IMPERIAL)

### EXTERNAL DIMENSIONS

<b>Length</b>	12,192 mm	40' 0.0"
<b>Width</b>	2,438 mm	8' 0.0"
<b>Height</b>	2,896 mm	9' 6.0"

### INTERNAL DIMENSIONS

<b>Length</b>	11,588 mm	38' 0.2"
<b>Width</b>	2,290 mm	7' 6.2"
<b>Height</b>	2,547.5 mm	8' 4.3"

### DOOR OPENING

<b>Width</b>	2,294 mm	7' 6.3"
<b>Height</b>	2,569 mm	8' 5.1"

### CAPACITY & WEIGHTS

<b>Inside Cubic Capacity</b>	67.6 m <sup>3</sup>	2,387 ft <sup>3</sup>
<b>Max Gross</b>	35,000 kg	77,160 lbs
<b>Payload</b>	30,440 kg	67,110 lbs
<b>Tare*</b>	4,560 kg	10,050 lbs

\*Tare can vary slightly based on reefer machine type.

**NOTE:** The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

**DISCLAIMER:** Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.



# 10ft Domestic Refrigerated Container



## STANDARD FEATURES

- Temperature range from -30°C to +30°C
- Easy open double doors (fully lockable)
- Flat flooring for easy maneuver of trolleys
- Aluminium loading ramp
- Internal lighting including emergency internal lighting in the event of a power failure
- Man trap panic alarm
- Plastic strip curtains

## OPTIONAL FEATURES

- Remote monitoring system (can be accessed via mobile phone, tablet or PC anywhere in the world)
- Can be ordered with Carrier, Starcool, Daikin or Thermo King machinery, with 3 Phase Power. These leading brands offer worldwide availability for parts and service

## TEMPERATURE CONTROLLED STORAGE IDEAL FOR:

- Food and drink
  - Fresh fruit
  - Ice cream
  - Dairy
  - Meat
  - Fish
- Pharmaceutical / medical equipment
- Many other products that require a controlled environment



REEFER ROOF



REEFER FRONT



REEFER SIDE



REEFER REAR

## DIMENSIONS (METRIC/IMPERIAL)

### EXTERNAL DIMENSIONS

<b>Length</b>	2,900 mm	10' 0"
<b>Width</b>	2,400 mm	8' 0"
<b>Height</b>	2,600 mm	8' 6"

### INTERNAL DIMENSIONS

<b>Length</b>	2,000 mm	6' 4"
<b>Width</b>	2,300 mm	7' 6"
<b>Height</b>	2,300 mm	7' 6"

### DOOR OPENING

<b>Width</b>	2,100 mm	7' 2"
<b>Height</b>	2,200 mm	7' 4"

### CAPACITY & WEIGHTS

<b>Inside Cubic Capacity</b>	12.5 m <sup>3</sup>	440 ft <sup>3</sup>
<b>Max Gross</b>	10,160 kg	22,400 lbs
<b>Payload</b>	8,100 kg	17,860 lbs
<b>Tare*</b>	2,060 kg	4,540 lbs

\*Tare can vary slightly based on reefer machine type.

**NOTE:** The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

**DISCLAIMER:** Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.



## CLASSIFICATION

### For Sale: New


Available via Triton's global network of supply locations.

# 20ft Refrigerated Container




## FEATURES

- Designed for safe transportation of perishable food, beverages and temperature sensitive cargo
- Ideal for on-site temperature controlled storage
- Strong, robust, insulated and repair friendly
- Resistant to bacteria
- Low heat leakage values
- Low GWP refrigerants compatible
- State-of-the-art design and low power consumption makes units highly efficient
- With HGSS roof end panels, vacuum valve, T-bar flooring and interior aluminum scuff lining
- Provisioned for track & trace feature
- Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- Can be ordered with Carrier or Thermo King machinery, with 3 Phase Power and CFC friendly refrigerant
- Backed up by Triton's global network of supply locations and dedicated sales and support teams
- Available globally

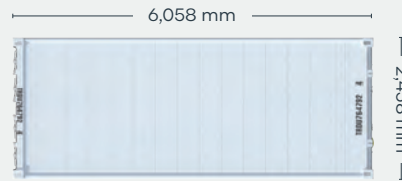

REEFER ROOF

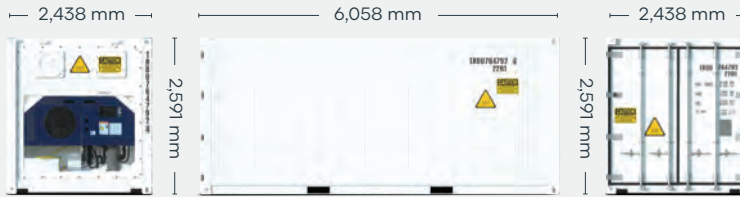

REEFER FRONT

REEFER SIDE

REEFER REAR

## DIMENSIONS (METRIC/IMPERIAL)

### EXTERNAL DIMENSIONS

<b>Length</b>	6,058 mm	19' 10.5"
<b>Width</b>	2,438 mm	8' 0.0"
<b>Height</b>	2,591 mm	8' 6.0"

### INTERNAL DIMENSIONS

<b>Length</b>	5,454 mm	17' 10.7"
<b>Width</b>	2,290 mm	7' 6.2"
<b>Height</b>	2,276 mm	7' 5.6"

### DOOR OPENING

<b>Width</b>	2,294 mm	7' 6.3"
<b>Height</b>	2,264 mm	7' 5.1"

### CAPACITY & WEIGHTS

<b>Inside Cubic Capacity</b>	28.4 m <sup>3</sup>	1003 ft <sup>3</sup>
<b>Max Gross</b>	30,480 kg	67,200 lbs
<b>Payload</b>	27,650 kg	60,960 lbs
<b>Tare*</b>	2,830 kg	6,240 lbs

\*Tare can vary slightly based on reefer machine type.

**NOTE:** The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

**DISCLAIMER:** Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.



# 20ft Domestic Refrigerated Container



## STANDARD FEATURES


- Temperature range from -35°C to +30°C
- 3 phase machinery
- Easy open double doors (fully lockable)
- Flat flooring for easy maneuver of trolleys
- Aluminium loading ramp
- Internal lighting including emergency internal lighting in the event of a power failure
- Man trap panic alarm
- Plastic strip curtains

## OPTIONAL FEATURES

- Remote monitoring system (can be accessed via mobile phone, tablet or PC anywhere in the world)
- Can be ordered with Carrier, Starcool, Daikin or Thermo King machinery, with 3 Phase Power. These leading brands offer worldwide availability for parts and service

## TEMPERATURE CONTROLLED STORAGE IDEAL FOR:

- Food and drink
  - Fresh fruit
  - Ice cream
  - Dairy
  - Meat
  - Fish
- Pharmaceutical / medical equipment
- Many other products that require a controlled environment

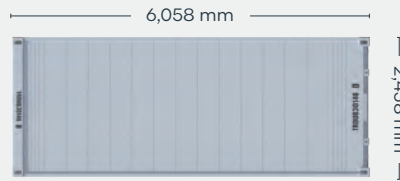

REEFER ROOF



REEFER FRONT



REEFER SIDE



REEFER REAR

## DIMENSIONS (METRIC/IMPERIAL)

### EXTERNAL DIMENSIONS

<b>Length</b>	6,058 mm	19' 10.5"
<b>Width</b>	2,438 mm	8' 0.0"
<b>Height</b>	2,591 mm	8' 6.0"

### INTERNAL DIMENSIONS

<b>Length</b>	5,462 mm	17' 9.1"
<b>Width</b>	2,290 mm	7' 6.2"
<b>Height</b>	2,286 mm	7' 5.0"

### DOOR OPENING

<b>Width</b>	2,294 mm	7' 6.3"
<b>Height</b>	2,238 mm	7' 3.4"

### CAPACITY & WEIGHTS

<b>Inside Cubic Capacity</b>	28.6 m <sup>3</sup>	1010 ft <sup>3</sup>
<b>Max Gross</b>	30,480 kg	67,197 lbs
<b>Payload</b>	27,650 kg	60,960 lbs
<b>Tare*</b>	2,830 kg	6,240 lbs

\*Tare can vary slightly based on reefer machine type.

**NOTE:** The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

**DISCLAIMER:** Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.

# 40ft High Cube Domestic Refrigerated Container



## STANDARD FEATURES


- Temperature range from -35°C to +30°C
- 3 phase machinery
- Easy open double doors (fully lockable)
- Flat flooring for easy maneuver of trolleys
- Aluminium loading ramp
- Internal lighting including emergency internal lighting in the event of a power failure
- Man trap panic alarm
- Plastic strip curtains

## OPTIONAL FEATURES


- Remote monitoring system (can be accessed via mobile phone, tablet or PC anywhere in the world)
- Can be ordered with Carrier, Starcool, Daikin or Thermo King machinery, with 3 Phase Power. These leading brands offer worldwide availability for parts and service

## TEMPERATURE CONTROLLED STORAGE IDEAL FOR:

- Food and drink
  - Fresh fruit
  - Ice cream
  - Dairy
  - Meat
  - Fish
- Pharmaceutical / medical equipment
- Many other products that require a controlled environment

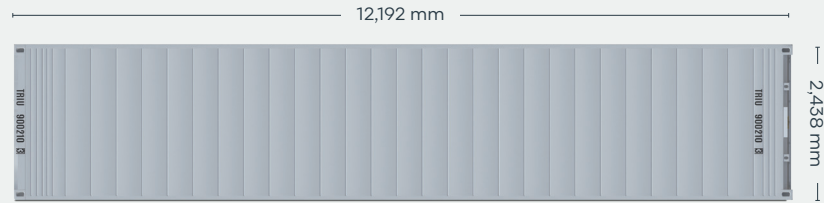

REEFER ROOF

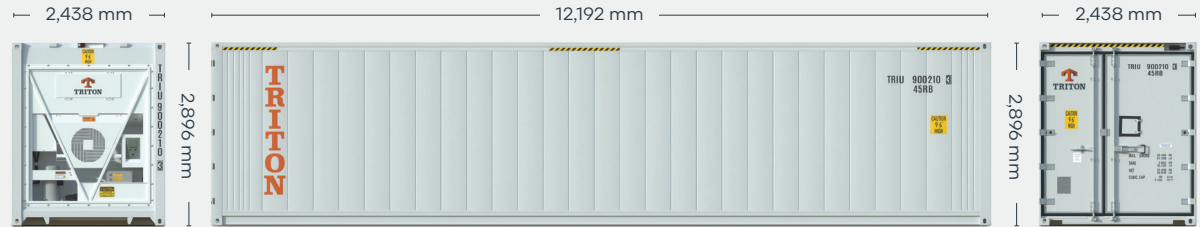

REEFER FRONT

REEFER SIDE

REEFER REAR

## DIMENSIONS (METRIC/IMPERIAL)

### EXTERNAL DIMENSIONS

<b>Length</b>	12,192 mm	40' 0.0"
<b>Width</b>	2,438 mm	8' 0.0"
<b>Height</b>	2,896 mm	9' 6.0"

### INTERNAL DIMENSIONS

<b>Length</b>	11,596 mm	38' 0.5"
<b>Width</b>	2,290 mm	7' 6.6"
<b>Height</b>	2,591 mm	8' 6.0"

### DOOR OPENING

<b>Width</b>	2,200 mm	7' 2.61"
<b>Height</b>	2,543 mm	8' 4.12"

### CAPACITY & WEIGHTS

<b>Inside Cubic Capacity</b>	68.8 m <sup>3</sup>	2,430ft <sup>3</sup>
<b>Max Gross</b>	34,000 kg	74,960 lbs
<b>Payload</b>	29,500 kg	65,036 lbs
<b>Tare*</b>	4,500 kg	9921 lbs

\*Tare can vary slightly based on reefer machine type.

**NOTE:** The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

**DISCLAIMER:** Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.





# 45ft High Cube Pallet Wide Refrigerated Container



## CLASSIFICATION


### For Sale: New

Available via Triton's global network of supply locations.



## FEATURES

- Additional height and length provides extra internal cubic capacity, which means greater interior stacking capacity for your goods
- Designed for safe transportation of perishable food, beverages and temperature sensitive cargo
- Ideal for on-site temperature controlled storage
- Strong, robust, insulated and repair friendly
- State-of-the-art design and low power consumption makes units highly efficient
- With HGSS roof end panels, vacuum valve, T-bar flooring and interior aluminum scuff lining
- Provisioned for track & trace feature
- Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- Resistant to bacteria
- Low heat leakage values
- Low GWP refrigerants compatible
- Can be ordered with Carrier or Thermo King machinery, with 3 Phase Power and CFC friendly refrigerant. Both leading brands offer worldwide availability for parts and service
- Backed up by Triton's global network of supply locations and dedicated sales and support teams
- Available globally

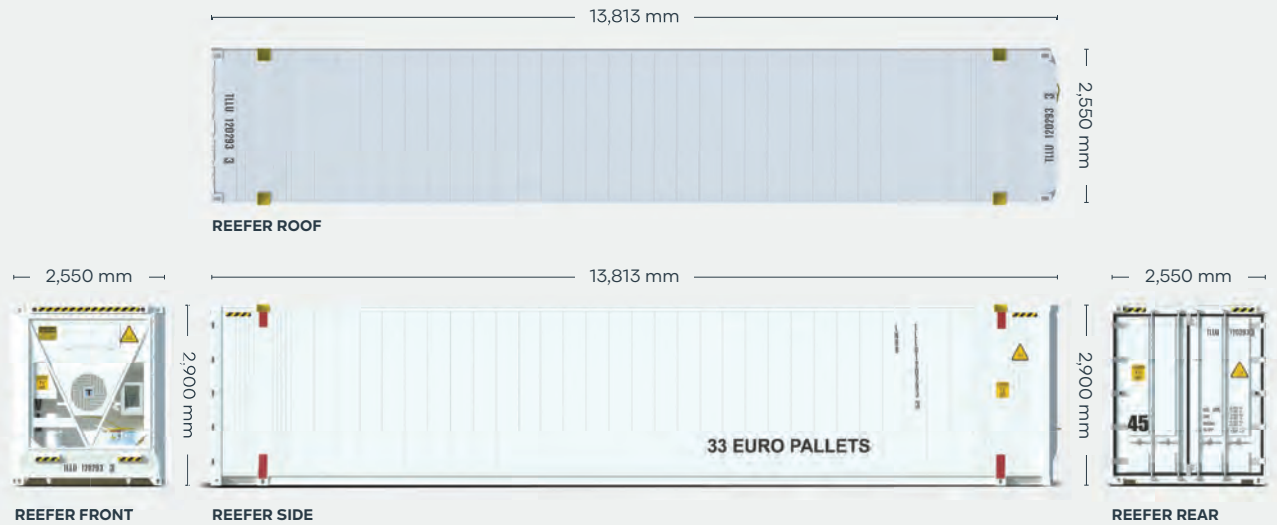

## DIMENSIONS (METRIC/IMPERIAL)

### EXTERNAL DIMENSIONS

<b>Length</b>	13,813 mm	45 0.0"
<b>Width</b>	2,550 mm	8' 3.6"
<b>Height</b>	2,900 mm	9' 5.1"

### INTERNAL DIMENSIONS

<b>Length</b>	13,261 mm	43' 0.0"
<b>Width</b>	2,440 mm	8' 0.0"
<b>Height</b>	2,570 mm	8' 4.3"

### DOOR OPENING

<b>Width</b>	2,440 mm	8' 0.0"
<b>Height</b>	2,570 mm	8' 4.3"

### CAPACITY & WEIGHTS

<b>Inside Cubic Capacity</b>	83.5 m <sup>3</sup>	2,949 ft <sup>3</sup>
<b>Max Gross</b>	35,000 kg	77,160 lbs
<b>Payload</b>	28,920 kg	63,760 lbs
<b>Tare*</b>	6,080 kg	13,400 lbs

\*Tare can vary slightly based on reefer machine type.

**NOTE:** The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

**DISCLAIMER:** Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.

HERE. THERE. EVERYWHERE

# We supply the world

Triton is the largest lessor of intermodal containers in the world with over 7 million TEU of containers. Our services are available in 89 countries around the globe. So, no matter where you need containers, we'll have them nearby. To find your nearest Triton Container Sales manager visit [www.tritoncontainer.com](http://www.tritoncontainer.com).



**Global inventory of  
cargoworthy containers  
for lease and sale.**



**Unrivalled container  
supply at competitive  
prices.**



**Outstanding and  
highly responsive  
customer services.**



**Global network of 20 offices  
and 3 independent agencies  
across 16 countries.**



**Equipment  
built to the  
highest quality.**



**Our size, strength and reliability  
make us the go-to supplier of  
intermodal shipping containers.**



**TRITON**

We're the biggest for a reason, contact our friendly experts and experience Triton's world-leading service and cost savings today. Imagine what we can do together.

[www.tritoncontainer.com](http://www.tritoncontainer.com)